



2017-2018/LED by
PolyBrite

BOREALISSM

INNOVATIVE LED LIGHTING


by PolyBrite International, Inc.

DLC V4.2
T5-type B
Line Voltage



Model	Voltage (V)	Lumens (lm)	Ref.Power (W)	CRI	CAP	Rated Life (hrs)
■ T5-4ft-3500lm-25W- BP	-	3500	25	83	G5	50,000

- DLC V4.2 listed
- Available CCT: 3000K/3500K/4000K/5000K/6500K





2017-2018/ LED
PolyBrite International

BOREALISSM
INNOVATIVE LED LIGHTING

by PolyBrite International, Inc.

DLC V4.2
T5-Type A
Ballast Compatible

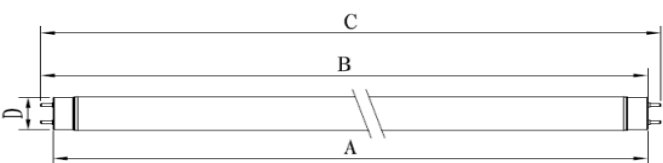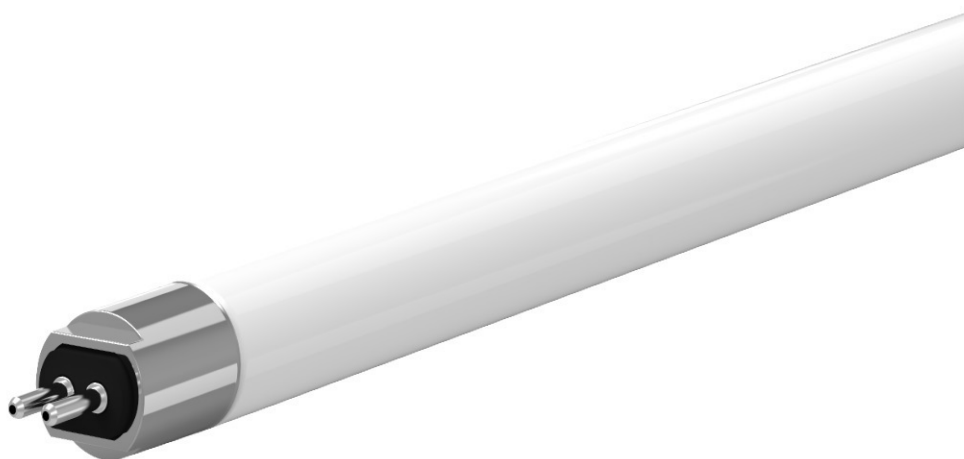

Dimension	Min	Max	Unit
A	/	1149.0	mm
B	1153.7	1156.1	
C	/	1163.2	
D	15.5	16.0	
Cap		G5	

Feature:

- * Designed with thermal switch
- * Compatible with mainstream electronic Ballasts
- * Superior diffusion coating: durable, uniform, non-yellowing



Model	Voltage (V)	Lumens (lm)	Ref. Power (W)	CRI	CAP	Rated Life (hrs)
■ T5-4ft-3500lm-25W-DR	—	3500	25	83	G5	50,000

- DLC V4.2 listed
- Available CCT: 3000K/3500K/4000K/5000K/6500K